

# 11,

# 11



	20, 32, 100, 200
	220
	50
	I 52
	3, 3, 3

3.62-00214267-044-97

: -40° +40° , : -10° +40° .  
 ( -414), ( -714). (-214, -314, -614),  
 -214, -314, -414, -614  
 -714- I (-414 - II) 12.2.007.0

spiral, 1-ESL-020- 27-32 spiral (Maxus), 10YSP32 E27, 10SSP32 E27, 10WSP32 E27 (Wolta), R7SW20 ECD-6U, 100, 200 . - 27.  
 R7SV20 ECD-6U, Z7NW20 ECL spiral, ZNV20 ECL spiral (Ecola).

G /4-  
 : 3...6 .





5

-714

# 11,

# 11



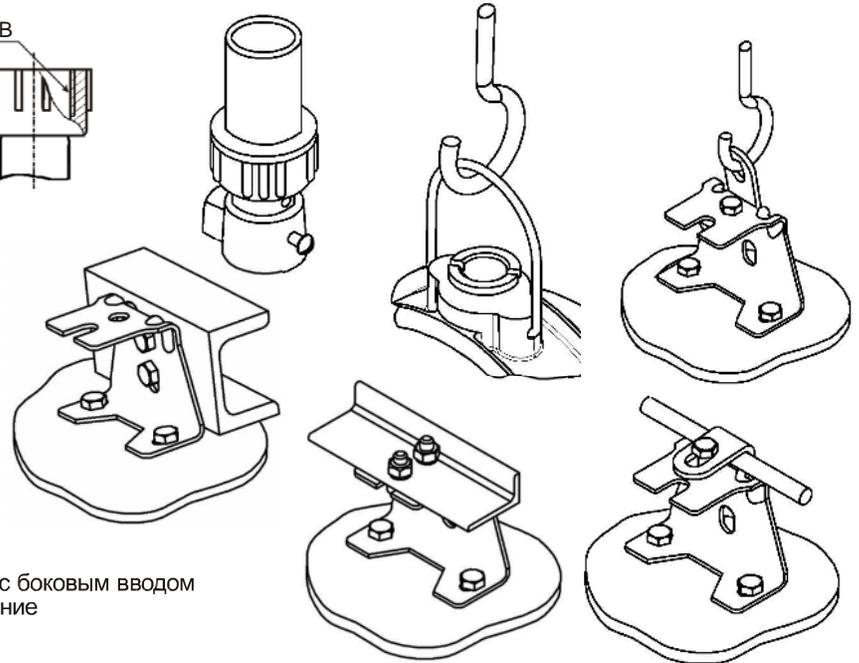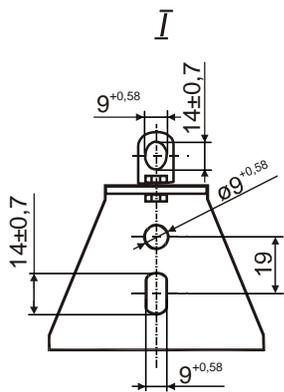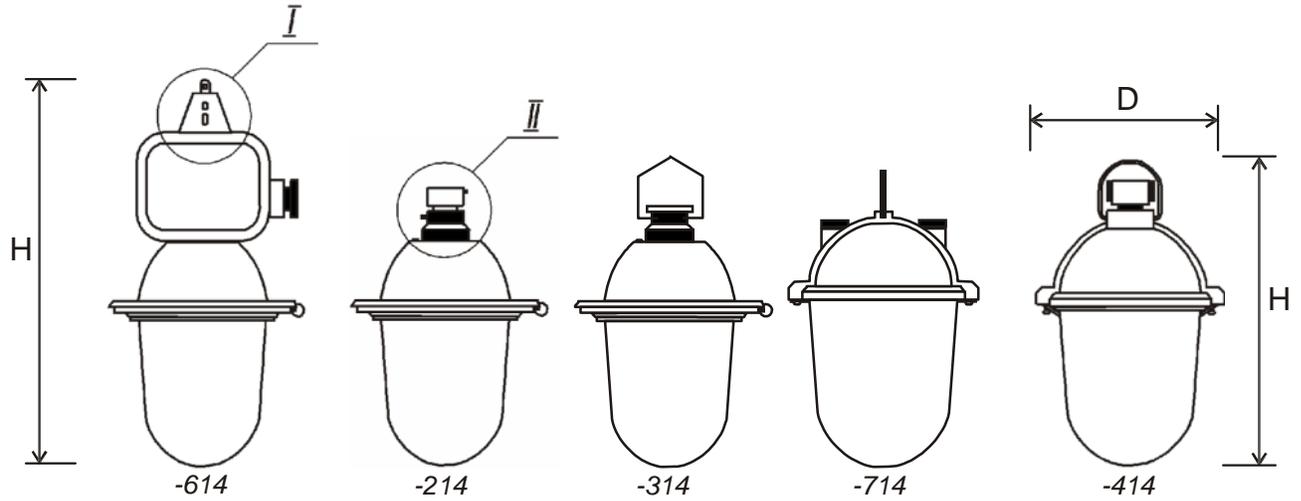

- XXX
- 2- на трубу G3/4-B
  - 3- на крюк
  - 4- на трубу G3/4-B и крюк
  - 6- на монтажный профиль, крюк с боковым вводом
  - 7- на крюк, транзитное подключение
- 1- степень защиты IP52
- 4- ( )

						%	DxH,	*
11-20-214	220	IP52	cFL	E27		75	180 250	1.2
11-20-314	220	IP52	cFL	E27		75	180 270	1.2
11-20-414	220	IP52	cFL	E27		75	158 280	1.1
11-20-714	220	IP52	cFL	E27		75	158 280	1.1
11-32-214	220	IP52	cFL	E27		75	210 320	2.2
11-32-314	220	IP52	cFL	E27		75	210 340	2.2
11-32-414	220	IP52	cFL	E27		75	185 330	1.8
11-32-714	220	IP52	cFL	E27		75	185 330	1.8
11-100-214	220	IP52	IncL	E27		77	180 250	1.2
11-100-314	220	IP52	IncL	E27		77	180 270	1.2
11-100-414	220	IP52	IncL	E27		77	158 280	1.1
11-100-614	220	IP52	IncL	E27		77	175 390	2
11-100-714	220	IP52	IncL	E27		77	158 280	1.1
11-200-214	220	IP52	IncL	E27		77	210 320	2.2
11-200-314	220	IP52	IncL	E27		77	210 340	2.2
11-200-414	220	IP52	IncL	E27		77	185 330	1.8
11-200-614	220	IP52	IncL	E27		77	205 450	2.6
11-200-714	220	IP52	IncL	E27		77	185 330	1.8

\*

±10%

# 11, 11 ( )



	23, 27, 100, 200
	220
	50
	I 54
	3.1, 2

3.62-00214267-044-97

-I, -II, : 1. -904 -901

c 23/ - 27 : -10° +40° ;  
 c MASTER PL Electronic 27W/865: -15° +40° ;  
 : -40° +40° .

100 27 200 9503-86). ( 85 23 100  
 II 12.2.007.0

200 23/ - 27 ( - ), MASTER PL Electronic 27W/865 (Philips). 100,  
 - 27.



: G /4- .  
 : 3...4 .

- : 5  
 - ;  
 - ; II ;  
 -

## 11, 11




# 11, 11 ( )

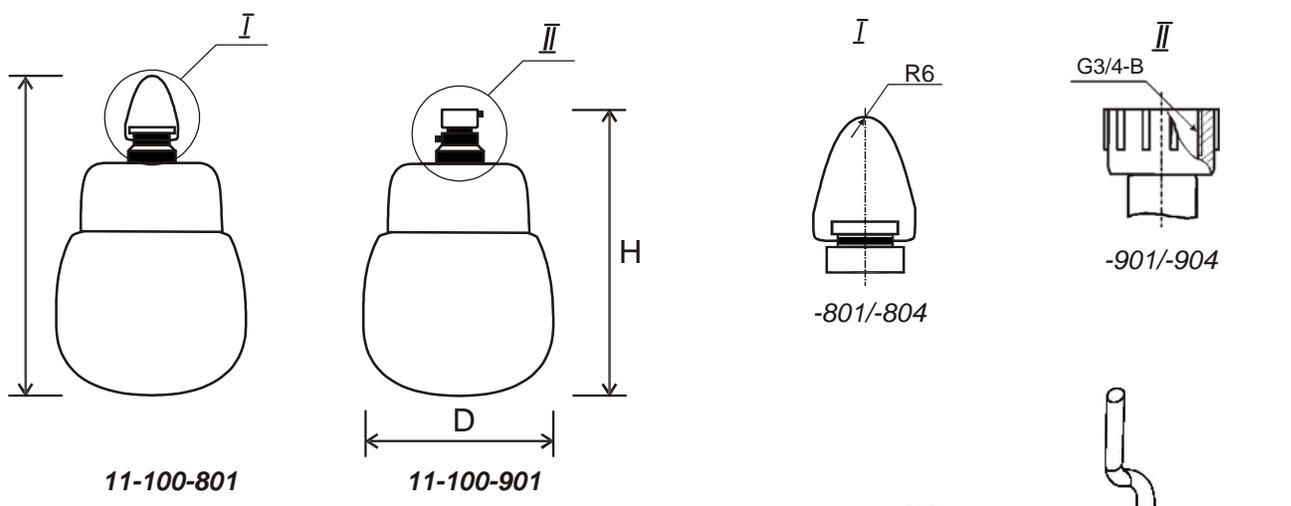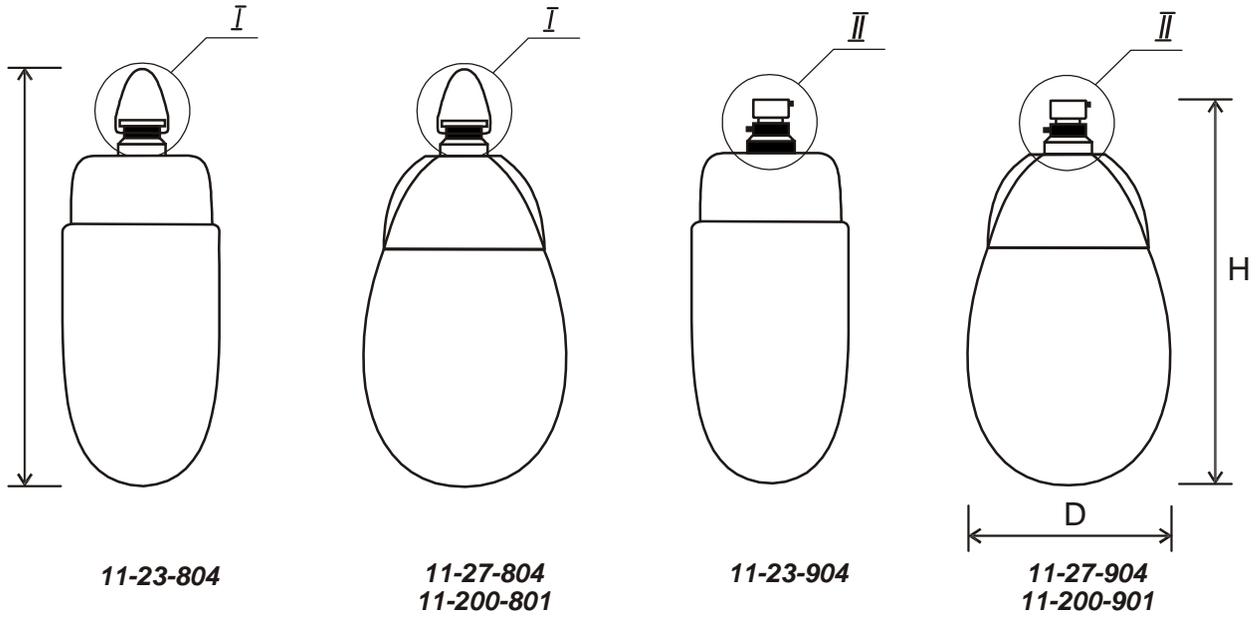

XXX  
 8-  
 9-  
 0-  
 1- ( )  
 4- ( )

G /4-  
 IP54

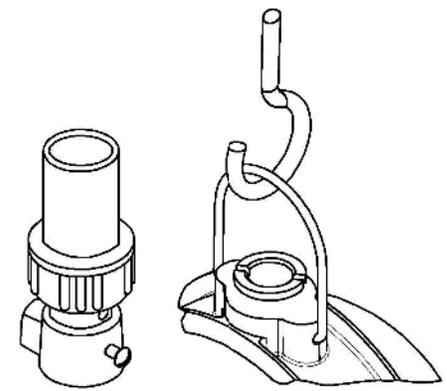

11-23-804	3.1	220	IP54	cFL	E27	%	DxH,	*
						80	110 325	1.02

11-23-904	3.1	220	IP54	cFL	E27		80	110 325	1.02
11-27-804	2	220	IP54	cFL	E27		80	155x310	1.6
11-27-904	2	220	IP54	cFL	E27		80	155x310	1.6
11-100-801	2	220	IP54	IncL	E27		65	130 240	0.7
11-100-901	2	220	IP54	IncL	E27		65	130 240	0.7
11-200-801	2	220	IP54	IncL	E27		65	155x310	1.2
11-200-901	2	220	IP54	IncL	E27		65	155x310	1.2

\*

±10%

